

variset VZ range wood slats jointing & fixing guides for seats running continuously along walls and complete room layouts


- 1 These layouts use standard length wood slats 1310mm, 1800mm, 2560mm long cut to length on site.
- 2 Check delivery note for numbers of frames and standard length wood slats.
- 3 Carefully read the layout drawing supplied. It shows frame positions and which standard length wood slats are to be cut in every position. Standard wood lengths are shown in [square brackets] on layout drawing.
- 4 Work out wood slat use.
- 5 Always use pre-radiussed slat ends at the end of each run. Butt joints on straight runs and mitres for corners are shown below.
- 6 Finish butt joints and mitres with suitable lacquer.
- 7 Using the screws provided, fix the slats by screwing twice, from below, through the fixing plates.
- 8 Make sure the best face is fixed upwards.

binns

variset **benches, hooks, hangers & shelves** for changing rooms & cloakrooms
variset® is designed by Royal Designer for Industry Kenneth Grange CBE, RDI

AJ Binns Limited

Harvest House, Cranborne Road
Potters Bar, Hertfordshire EN6 3JF
Telephone 01707 85 5555 Fax 01707 85 7565
email enq@ajbinns.com
web www.ajbinns.com

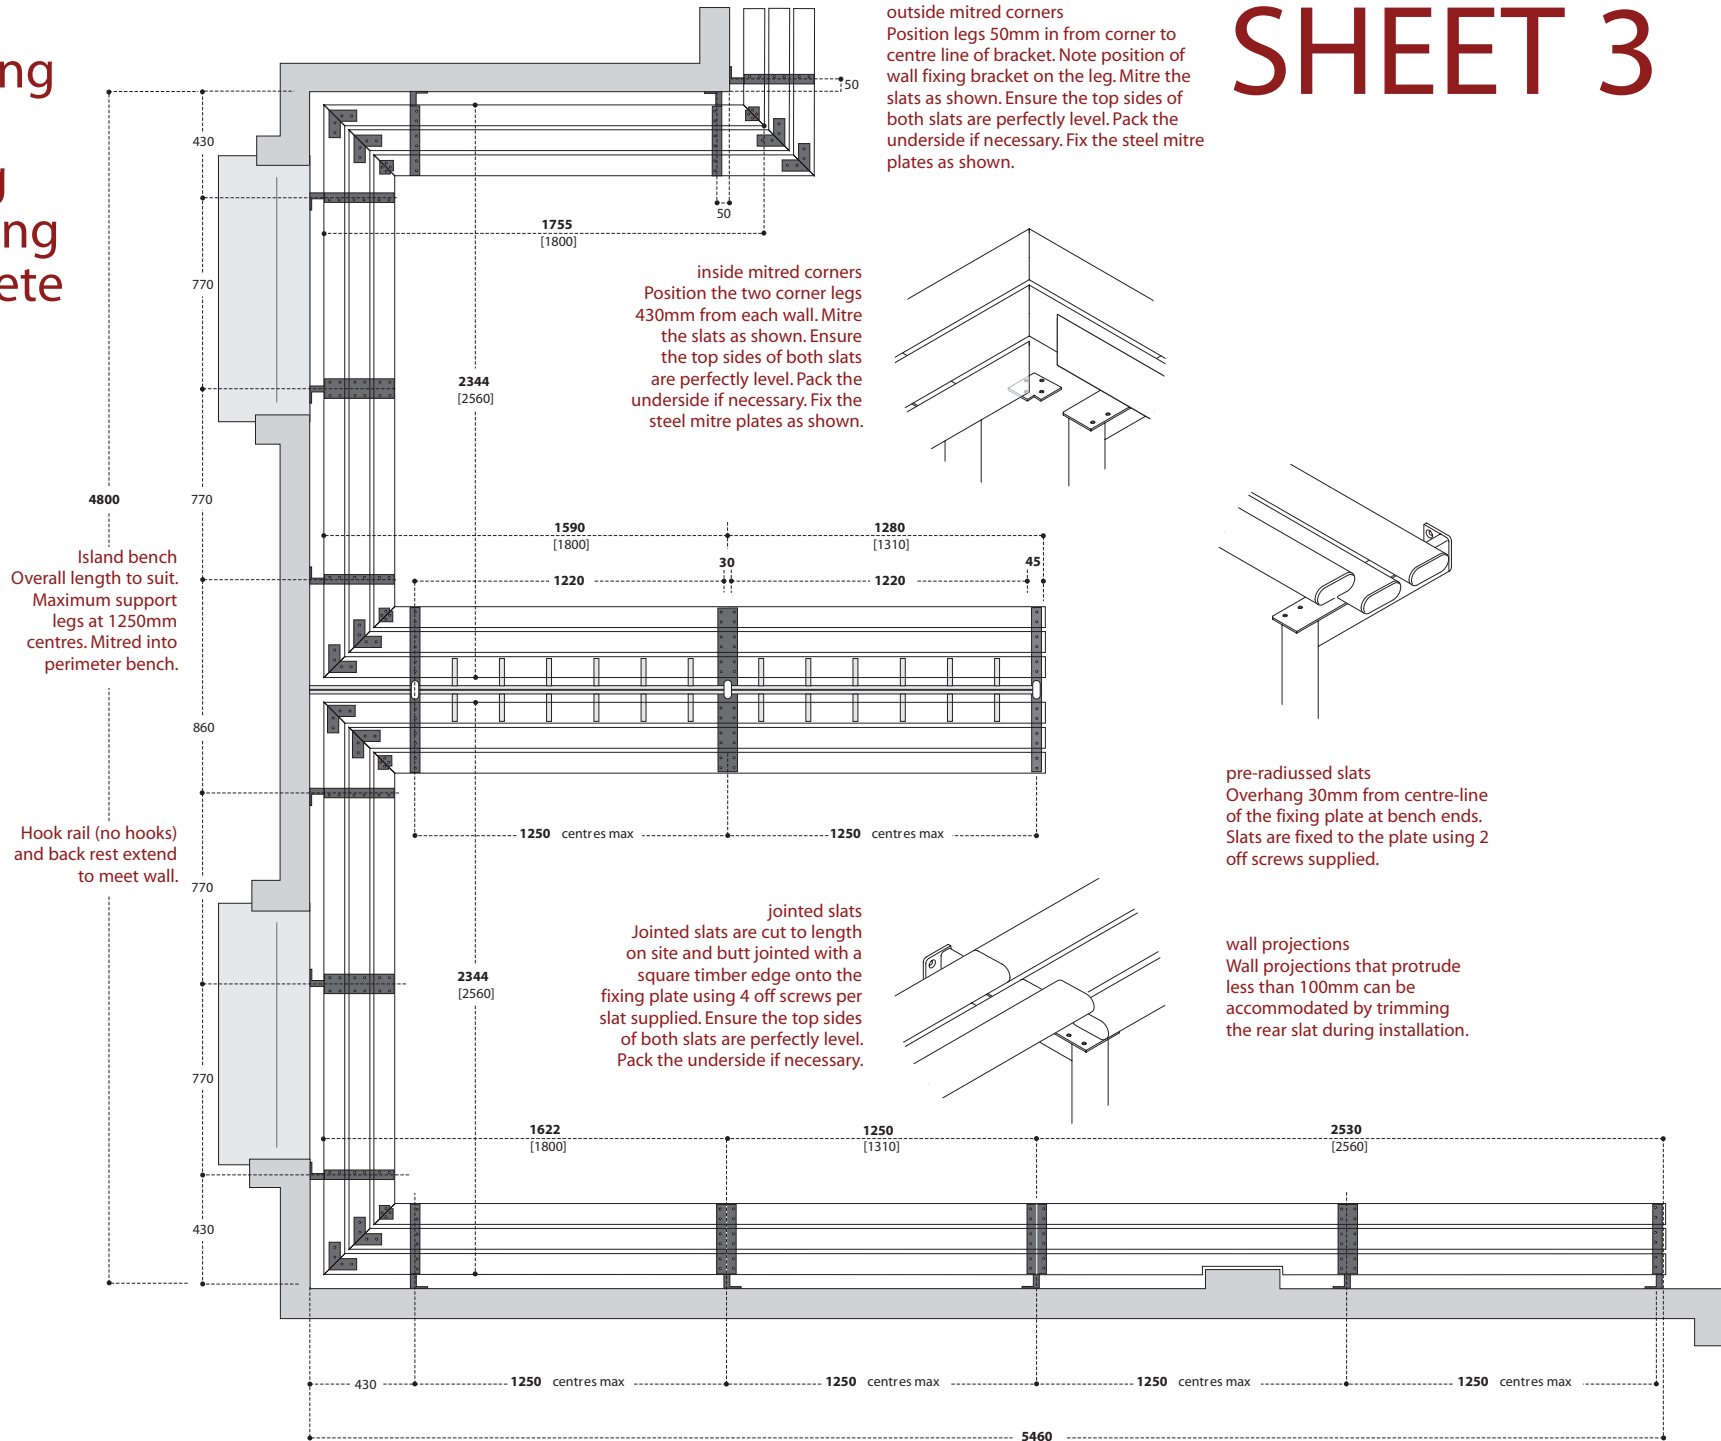

SHEET 3